

TAG-10 CUTTER Unit

For wire, rod & shaped wire
Pneumatic or Hydraulic Actuator
Cast Iron frame & Steel construction
Compact design
Centralized oil lubrication system
Easy interchangeability of parts for different material profiles
Hardened & ground toolsteel cutting blades and material guides
Additional material guides for profiled materials

CUTTING CAPACITY:- 1 mm ~ 12 mm dia.



INPUT PRESSURE:-

Pneumatic Unit: 1 kg/cm² (min) 6 kg/cm² (max)
Hydraulic Unit: 50 kg/cm² (min) 150 kg/cm² (max)

CUTTING PRESSURE (at contact point with material):-

Pneumatic Unit: 1800 kg/cm²
Hydraulic Unit: 4500 kg/cm²

CUTTING TIME:- approx. 0.4 seconds for 12 mm material dia.

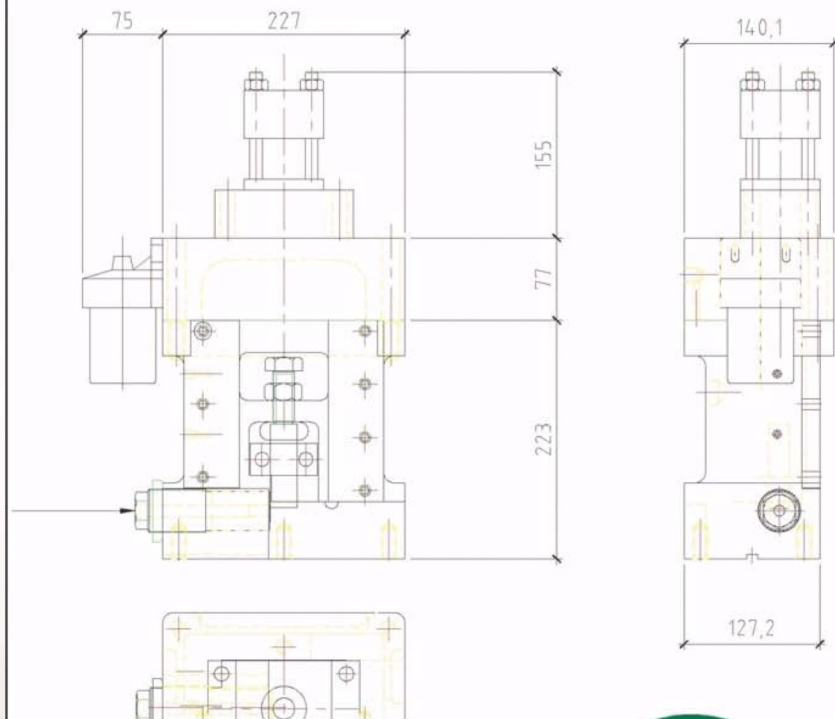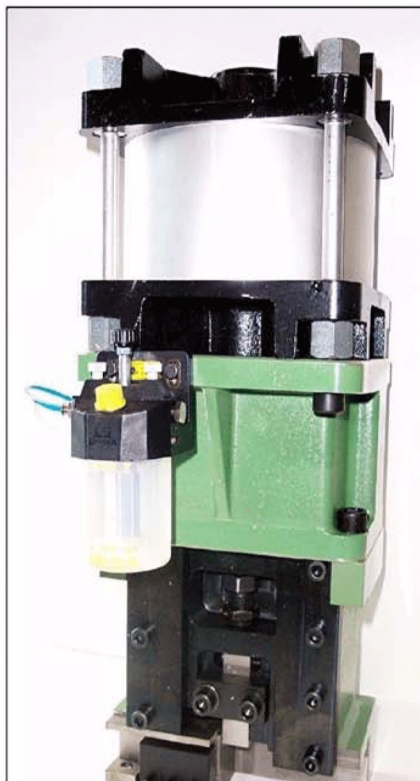

AITMAC, INC
ADVANCED INDUSTRIAL TECHNOLOGIES & MACHINES, INC

329 Rayette Rd. #14
Concord, Ontario
L4K 2G1, Canada

ph: 1-905-761-6165
fx: 1-905-761-6168
aitmac.ca@gmail.com

